

AUTOMATIC PRE-TREATMENT MACHINE

# PRETREATER PRO

PRE-TREAT  
YOUR GARMENTS  
**LIKE A PRO**


The key for  
vibrant colors and  
sharp details



**polyprint**<sup>®</sup>  
DTG PRINTERS

Quality and Consistency | Economy | Ease of use

# PRETREATER PRO

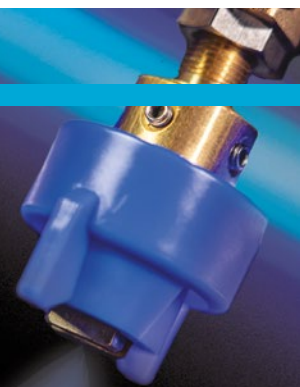

## Everything you need to excel in DTG

**Precision** spraying to prepare garments for amazing prints, **automation** for less downtime, and **simplicity** for less mess and hassle.

**Exceed** your customer expectations with **vibrant colors**, **sharp details**, and **great washability!**



41x60 cm  
(16.1x23.6 in)  
true spray area  
(4 nozzles)

### AUTOMATE YOUR WORKFLOW

Operate the entire machine from a **7 inch touchscreen**. Enjoy 5 preselected options, **10 custom presets**, and a **“Scan-to-Spray”** barcode automation feature for quick runs. →



### SPRAY ACCURATELY

Pick “Linear” consecutive or “Grid” non-consecutive areas to **pinpoint where your prints land** and save on liquids. ↓



### SPRAY CONSISTENTLY

An auto-recirculation system and washable filters **keep liquids uniform and sediment-free**, so every batch is exactly the same. ←



**polyprint**<sup>®</sup>  
DTG PRINTERS



## Take the stress away!



### SPRAY PERFECTLY & PRECISELY

Prepare textiles for **remarkable** prints with **minimal fuss**.



### SAVE ON LIQUIDS

**Minimize** waste by selecting the exact area and liquid amount needed.



### ANYONE CAN USE IT

Its automatic features make PreTreater Pro a snap to learn and simple to take on.



### USE ONLY WHAT YOU NEED

Choose between 14-80 ml to spray a **specific liquid amount** without costly experiments.



### MAXIMIZE RUNTIME

Its "box-in-a-box" design **shields** the machine's parts from mist, reducing maintenance and **extending its lifespan**.



### MAKE NO MESS

Anyone can do it! 4x5lt replaceable tanks (2 pretreat, 1 cleaner, 1 maintenance) **prevent** unwanted **spills** when changing tanks, creating a **clean workspace**.






## Here to serve your needs

Based on your feedback, PreTreater Pro is designed to deliver **top-quality results**, **consistency** in repeated jobs and **improved washability** while **saving on liquids**.

## Technical Specifications

MAX SPRAY AREA	41x60 cm (16.1x23.6 in)
METHOD	Y axis movement
DIRECTION	Uni-Directional
NOZZLES	4 nozzles with 0.53 mm (0.02 in) orifice diameter, 80° angle
QUANTITY SELECTION	14-80 ml
TANKS	2 pretreatment liquids, 1 cleaning liquid, 1 waste tank, all 5 liters each
DIMENSIONS	L1040xW840xH660 mm (L41xW33xH26 in)
WEIGHT	104 kg (229 lb)
VOLT/FREQUENCY	230V / 50-60 Hz 120V / 50-60 Hz
POWER	1,61 A / 370 W (230 V) 3,10 A / 370 W (120 V)
OPERATING CONDITIONS	<b>Range:</b> 15-30 °C (59-86 °F) with 30-70% RH <b>Ideal:</b> 22-26 °C (71.6- 78.8 °F) with 55% RH

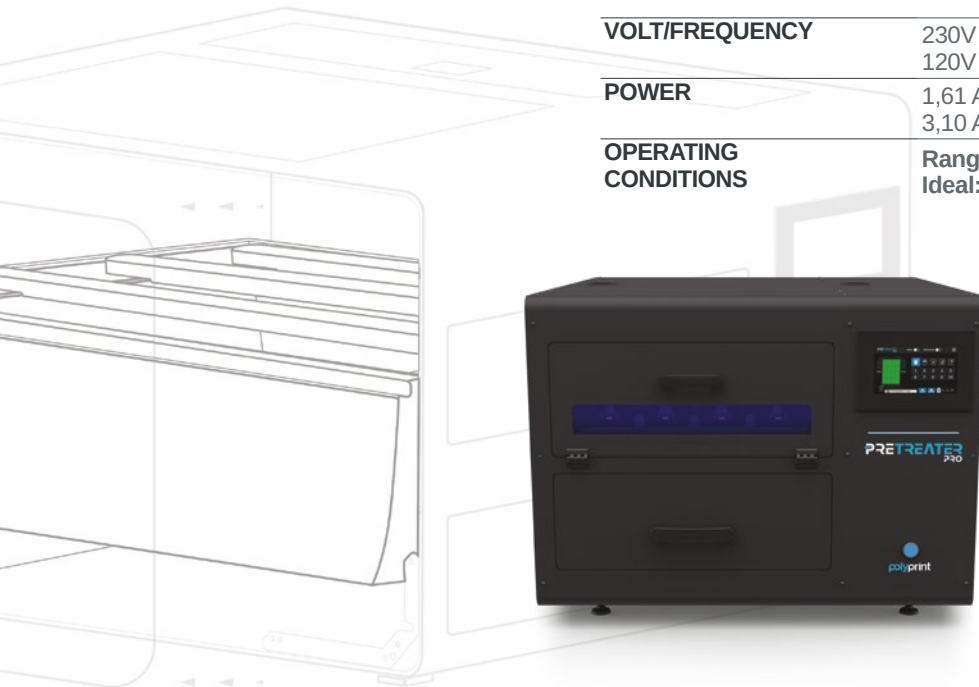

**PRETREATER**  
PRO

2022-06-16\_PRETREATER PRO\_BIFOLD\_EN\_V1.1